




Flail mower

- City Ranger 2260

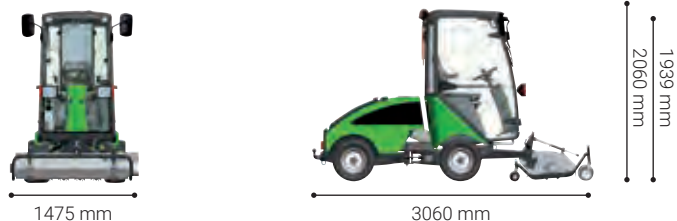

Standard equipment:

Clearing height adjustment

The clearing height is adjusted using the two forward wheels (rough and fine adjustment). Rough adjustment using seven adjusting rings in interval 0-110 mm. Fine adjusting carried out by a variable-adjustable lever.

Extra equipment (options):

Verticutter knives

Changing the flails with vertical blades converts the flail mower into a verticutter, which deals with moss and weeds without the need for pesticides. The verticutter removes moss while simultaneously cutting a thin score in the turf, so the grassroots are aired. This strengthens the grass so the turf is much more resilient to weeds.

Top filter

It is recommend to use a top filter for lawn mowing as this stops the radiator from becoming choked with grass and protects the motor.

Counterweight

It is recommended to use a counterweight on the back of the City Ranger 2260 when using the flail mower.

Technical specifications

Dimensions

Length	mm	3060
Width	mm	1475
Height with cabin / roll bar (ROPS)	mm	1939 / 2060

Storage dimensions

Length	mm	955
Width	mm	1475
Height	mm	530

Weight

Weight (flail mower / verticutter)	kg	154 / 151
------------------------------------	----	-----------

Performance

No. of flails	pcs.	76
No. of vertical blades (max.)	pcs.	38
Flail - clearing width	mm	1225
Flail - clearing height	mm	0-110
Rotation of blades	rpm	2800
Verticutter - clearing width	mm	1170
Verticutter - clearing depth	mm	0-15

Noise emissions

Sound power level LwA (2000/14/EC and DIN EN ISO 3744)	dB(A)	104
--	-------	-----

CE certified according to EU directive

