




Snow sweeper

- City Ranger 2260

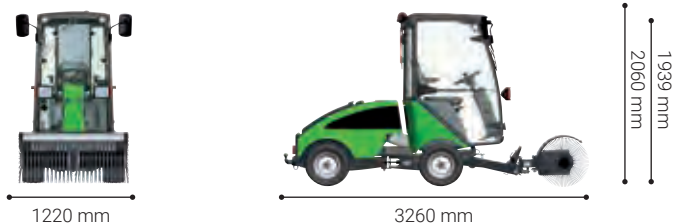

Standard equipment:

| | |
|---------------------------------------|---|
| Trapeze mounting | The trapeze-mounting ensures the snow sweeper remains clear of the wheels of the utility machine at all times, whatever the angle. The snow sweeper automatically turns with the utility machine - always sweeping in front of the wheels of the utility machine. |
| Reverse rotation function | Reversing the brush rotation ensures that the operator can sweep material when reversing out of an alley or parking spot, which ensures an excellent result. |
| Adjustable speed | The rotation speed can easily be adjusted from the cabin to match the need for sweeping. |
| Support stand | A support stand with a wheel is build in to the snow sweeper for easy storage. |
| Adjustable weight distribution | For optimum functionality as well as minimum wear of the attachment. |

Extra equipment (options):

| | |
|---------------------------------|---|
| Extended brush guard | Attaching a brush guard extends the snow sweeper cover, which minimises the snow whirling up on the front wind-screen. Furthermore, the guard makes it easier to control the direction of swept sand and gravel during summer operation. This can be retrofitted on existing snow sweepers as well. |
| Anti-corrosion treatment | The anti-corrosion treatment will extend the life of the attachment. |

Technical specifications

| Dimensions | | |
|---|-------------------|-------------|
| Length | mm | 3260 |
| Width | mm | 1220 |
| Height with cabin / roll bar (ROPS) | mm | 1939 / 2060 |
| Storage dimensions | | |
| Length | mm | 820 |
| Width | mm | 1220 |
| Height | mm | 650 |
| Weight | | |
| Weight (snow sweeper) | kg | 104 |
| Performance | | |
| Clearing width - straight | mm | 1220 |
| Clearing width - angled 25° | mm | 1150 |
| Ground clearance below brush | mm | 420 |
| Brush diameter Ø | mm | 550 |
| Operating speed | km/h | 1-15 |
| Theoretical sweeping capacity | m ² /h | 18300 |
| Handling snow depth up to | mm | 150 |
| Brush speed | rpm | 0-240 |
| Turning angle | | 25° |
| CE certified according to EU directive | | |

